



PCT/GB2004/002178
Rec'd PCT/PTO 06 OCT 2005
10/552612
INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 29 JUN 2004

WIPO


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

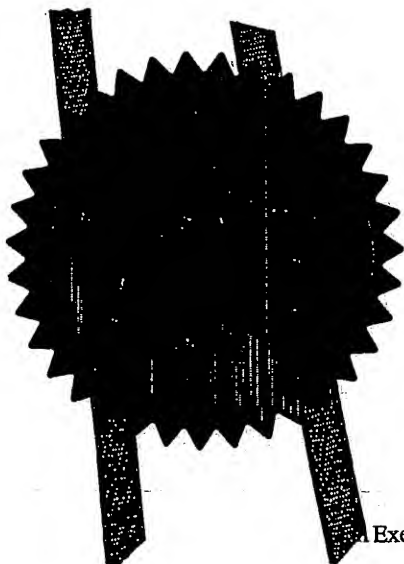

Signed

Andrew Gurney

Dated 7 June 2004

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Executive Agency of the Department of Trade and Industry


BEST AVAILABLE COPY

Patents Form 1/77

Patents Act 1977
(Rule 16)20MAY03 E808545-1 D02834
P01/7700 0.00-0311494.9

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)



The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference 15783 MdX

2. Patent application number
(The Patent Office will fill in this part)

0311494.9

3. Full name, address and postcode of the or of
each applicant (underline all surnames)Stanelco Fibre Optics Ltd
Systems House
Brunel Way
Segensworth East
Fareham
Hampshire. PO15 5SD

Patents ADP number (if you know it)

If the applicant is a corporate body, give the
country/state of its incorporation

England & Wales

7526528001

4. Title of the invention Making foamed bodies

5. Name of your agent (if you have one)

Peter Turquand MANSFIELD
Accentus plc
Patents Dept
329 Harwell
Didcot
Oxfordshire OX11 0QJ"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

Patents ADP number (if you know it)

8132243001

6. If you are declaring priority from one or more
earlier patent applications, give the country

Country

Priority application number
(if you know it)Date of filing
(day / month / year)7. If this application is divided or otherwise
derived from an earlier UK application,
give the number and the filing date of
the earlier application

Number of earlier application

Date of filing
(day / month / year)8. Is a statement of inventorship and of right
to grant of a patent required in support of
this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an

applicant, or

- c) any named applicant is a corporate body.

See note (d).

0069350 20-May-03 10:01

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description	7
Claim(s)	2
Abstract	1
Drawing(s)	2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

Signature

Date

20/5/03

12. Name and daytime telephone number of person to contact in the United Kingdom

Frances Espin - 01235 432037

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

0069350 20-May-03 10:01

Patents Form 1/77

DUPLICATE

- 1 -

Making Foamed Bodies

The present invention relates to a method and an apparatus for making foamed bodies, particularly but not
5 exclusively those made with a biodegradable or water-soluble polymeric material.

In recent years considerable research has gone into the development of biologically degradable polymers, for
10 example those based on starch. For example US 5 705 536 (Tomka) mentions that a starch foam can be produced by mixing powdered starch with water, and extruding the mixture while converting the water to steam. Tomka indicates that it would be advantageous to use
15 thermoplastic starch, or polymer blends containing thermoplastic starch, in producing such foamed bodies; such starch contains typically less than 1% by weight of water, and Tomka teaches mixing it with a fibrous material such as ramie fibres containing moisture. The
20 mixture can be converted into a foam by extrusion at about 200°C. The properties of the resulting product may be modified by adding, for example, plasticising agents and lubricants to the mixture. As explained in US 6 235 815B (Loercks et al) thermoplastic starch can be made
25 from essentially anhydrous starch that is homogenised in an extrusion process with the addition of a plasticiser such as glycerol or sorbitol, and is melted within a temperature range between 120° and 220°C; thermoplastic starch may be combined with other biodegradable polymers
30 such as polycaprolactone. Loercks et al teach that a polymer mixture can be made from anhydrous starch mixed directly with a hydrophobic polymer such as an aliphatic polyester, under dry conditions. And US 6 494 704B (Andersen et al) describe a mould press for making
35 articles such as bowls or trays, the articles being formed between male and female mould halves, and being

- 2 -

made from a starch-based composition that also contains water and may also contain fibres and inorganic fillers, the moulds being heated to between 170° and 220°C. The moulds may be of a metal such as steel or brass, and may
5 be provided with a nonstick coating of PTFE. Some of the resulting water vapour is allowed to escape through a vent, while some causes foaming expansion of the material in the mould. After a time that is preferably in the range between 30 seconds and 2 minutes the mould halves
10 can be separated, and the foamed bodies removed. It will be appreciated that a more rapid heating cycle would be beneficial.

According to the present invention there is provided
15 a method of making a foamed body, in which a polymer mixture is introduced into a mould in which the polymer mixture is heated to form a foam and to fill the mould, the mould being defined between moulding surfaces of two opposed parts that mate together, wherein each mould part
20 is of electrically conducting material and at least one of the moulding surfaces is coated with an electrically insulating material, and wherein radio-frequency signals are applied between the mould parts so that the polymer mixture is heated by dielectric heating.

25

The radio frequency supply may in principle be at a frequency between 1 MHz and 200 MHz, usually between 10 MHz and 100 MHz, but stringent limits are imposed on any emitted radio waves. In practice therefore the choice of
30 frequency may be more limited. For example the supply frequency may be 27.12 MHz, or 40.68 MHz. This provides a much more rapid way of heating the polymer mixture, so that the heating, foaming and setting requires no more than about 15 seconds, and preferably between 5 and 10
35 seconds.

- 3 -

The present invention also provides an apparatus for making a foamed body from a polymer mixture, the apparatus including a mould defined between moulding surfaces of two opposed parts that mate together, wherein each mould part is of electrically conducting material and at least one of the moulding surfaces is coated with an electrically insulating material, and means to apply radio-frequency signals between the mould parts so that polymer mixture between the mould parts is heated by dielectric heating.

The electrically insulating material used to coat at least one of the moulding surfaces is preferably one that is not dielectrically heated, for example PFA (perfluoro alkoxyalkane).

The polymer mixture is one that contains a material which forms a gas or vapour on heating, and for example it may contain water. The polymer mixture is preferably a biodegradable polymer mixture, preferably a starch-based polymer, and may include thermoplastic starch.

The invention will now be further and more particularly described, by way of example only, and with reference to the accompanying drawings in which:

Figure 1 shows a cross-sectional view through the upper and lower halves of a mould, when separated;

Figure 2 shows a view corresponding to that of figure 1 during manufacture of a foamed body within the mould; and

Figure 3 shows a diagrammatic view of the electrical circuit of the apparatus that includes the mould.

- 4 -

Referring to figures 1 and 2, an apparatus 10 for making trays of a foamed starch-based polymeric material includes upper and lower mould halves, 12 and 14 respectively, which mate together to leave a narrow cavity 15 between them in which the tray is to be formed. Each mould half 12 and 14 is of brass, and the upper mould half 12 has a coating 16 of PFA electrical insulator over its entire lower surface. With the two halves 12 and 14 separated as shown in figure 1, polymeric material is introduced into the lower half 14, and the upper half 12 is then lowered into position. A peripheral ridge 18 of electrically-insulating alumina on the lower half 14 has a sloping inner face, and contacts a correspondingly-shaped peripheral rim on the upper half 12 such that the cavity 15 is of uniform thickness 2.5 mm and the halves 12 and 14 of the mould are held accurately aligned. Radio frequency signals are then applied between the two halves 12 and 14, which act as electrodes. The alumina ridge 18 ensures that the radio-frequency signals are concentrated across the cavity 15. The polymeric material becomes hot, and water in the polymeric mixture boils, so that the material becomes a foam filling the entire cavity 15.

Immediately adjacent to the peripheral ridge 18, the upper mould half 12 defines a peripheral recess 20 which communicates through a narrow slot with the mould cavity 15. There are several narrow ducts 22 (only one of which is shown) extending through the upper mould half 12 from this peripheral recess 20. Steam from the hot polymeric mixture can escape into the peripheral recess 20, and hence escape through the narrow ducts 22. After about eight seconds the polymeric mixture has formed a self-supporting tray, and the two halves are again separated, and the tray removed.

- 5 -

It will be appreciated that such an apparatus may be used to make a wide range of different products, by using appropriately-shaped moulds, and that the products may be of any desired shape. For example it may be used to make
5 multi-compartment trays, circular or square plates or bowls, or cups, or a clam-shell container formed of two shells hinged together along a straight edge. It will also be appreciated that, although the apparatus has been shown as comprising only a single mould, there might
10 instead be several moulds forming an array, all the moulds being connected to a common radio frequency supply.

Referring now to figure 3, the electrical circuit is
15 shown diagrammatically. A radio-frequency signal generator 25, which is a solid-state device, supplies the radio frequency signal via a coaxial cable 26 to a matching network 28, from which the signal is supplied via a coaxial cable 30 to the upper mould half 12, the
20 lower mould half 14 being earthed. The matching network 28 is shown in more detail. The signal passes through a variable capacitor 32, an inductor 33, and a variable capacitor 34, and so to the cable 30. A monitoring circuit (not shown) monitors the radio frequency current
25 and voltage, and adjusts the values of the variable capacitors 32 and 34 so that the impedance presented to the generator 25 remains at a constant value such as 50 Ω . The junction between the capacitor 32 and the inductor 34 is connected through a capacitor 36 to earth
30 potential, and the effective capacitance of this capacitor 36 can be adjusted. This has the effect of finely adjusting the radio frequency voltage applied between the live electrode (the upper mould half 12) and the opposed, earthed electrode (the lower mould half 14),
35 and the RF current supplied. It thus controls the power that is actually supplied between the mould halves 12 and

- 6 -

14.

The nature of the polymer is not critical to the present invention, although the polymer is preferably a biodegradable polymer, and is preferably at least partly starch-based. The polymer may include thermoplastic starch, but because this may not contain significant quantities of water it may be necessary to include another ingredient that provides the requisite water (or other source of gas or vapour) in order to form the foam. A benefit of using thermoplastic starch is that the resulting foamed body, although biodegradable, does not readily dissolve in water. Alternatively the polymer may comprise starch granules at least partly gelatinised by reacting with water. The polymeric mixture may contain other polymeric materials, and may also contain reinforcing fibres, such as cellulose organic fibres such as those from hemp or cotton or other plants. Although the fibres strengthen the resulting foamed products, the concentration of fibres preferably does not exceed about 50%, and is preferably no more than 25% of the total weight. It will also be appreciated that the polymeric mixture may be introduced into the mould in the form of a film, granules, pellets, a pre-form or a pasty mixture.

25

It will be appreciated that the apparatus may be modified in various ways, for example the lower mould half 14 may be provided with a coating of an electrical insulator, as is the upper half 12. In each case this coating 16 may be of thickness in the range 20 to 50 μm . And as mentioned above, the mould shape will depend upon the shape of the desired product. When making a product that includes a hinge (such as a clam-shell container), the hinge may be provided by a strip of a polymeric non-foaming material (for example a strip of hydroxypropyl methyl cellulose) placed in the mould along with the

35

20-MAY. '03 (TUE) 10:00

PATENTS DEPT

FAX:01235 436658

P.011

- 7 -

mixture which forms the foam, so the hinge strip becomes
integral with the foam parts on each side of the hinge.

0069350: 20-May-03 10:01

- 8 -

Claims

1. A method of making a foamed body, in which a polymer mixture is introduced into a mould in which the polymer
5 mixture is heated to form a foam and to fill the mould, the mould being defined between moulding surfaces of two opposed parts that mate together, wherein each mould part is of electrically conducting material and at least one of the moulding surfaces is coated with an electrically
10 insulating material, and wherein radio-frequency signals are applied between the mould parts so that the polymer mixture is heated by dielectric heating.

2. A method as claimed in claim 1 wherein the radio-
15 frequency signals are applied at a frequency between 1 MHz and 200 MHz.

3. A method as claimed in claim 1 or claim 2 wherein the polymer mixture is a biodegradable polymer mixture.
20

4. A method as claimed in claim 3 wherein the polymer mixture is at least in part starch-based.

5. An apparatus for making a foamed body from a polymer
25 mixture, the apparatus including a mould defined between moulding surfaces of two opposed parts that mate together, wherein each mould part is of electrically conducting material and at least one of the moulding surfaces is coated with an electrically insulating
30 material, and means to apply radio-frequency signals between the mould parts so that polymer mixture between the mould parts is heated by dielectric heating.

6. An apparatus as claimed in claim 5 wherein the
35 electrically insulating material used to coat at least one of the moulding surfaces is one that is not

- 9 -

dielectrically heated.

7. An apparatus as claimed in claim 5 or claim 6
wherein, when the mould parts are together, they are held
5 apart by an electrical insulator that is thicker than the
gap defining the mould.

8. A method of making a foamed body from a polymer
mixture, substantially as hereinbefore described with
10 reference to, and as shown in, the accompanying drawings.

9. An apparatus for making a foamed body from a polymer
mixture, substantially as hereinbefore described with
reference to, and as shown in, the accompanying drawings.
15

15783 MdX

20

P.T. Mansfield
Chartered Patent Agent
Agent for the Applicants

- 10 -

AbstractMaking Foamed Bodies

5 A foamed body is made by introducing a polymer mixture into a mould in which it is heated to form a foam and to fill the mould. The mould is defined between two opposed parts (12, 14) that mate together, and each mould part is of electrically conducting material, and at least
10 one of the moulding surfaces is coated (16) with an electrically insulating material. Radio-frequency signals are applied (25) between the mould parts (12, 14) so that the polymer mixture is heated by dielectric heating. This can give a more rapid cycle time than
15 using heated moulds. The radio frequency signals may be 27.12 MHz, or 40.68 MHz. The polymer may be biodegradable and starch-based.

Accentus plc

Sheet 1 of 2

Fig. 1



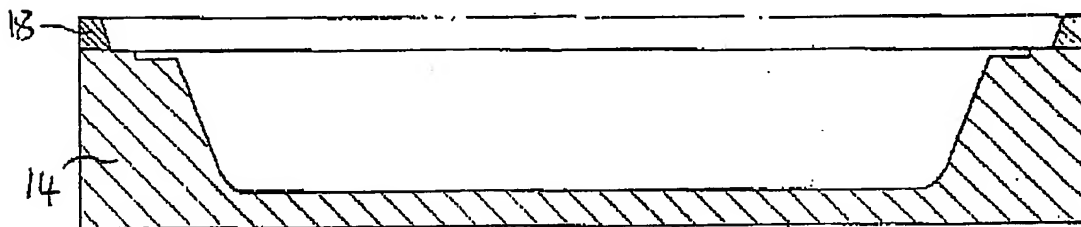


Fig. 2

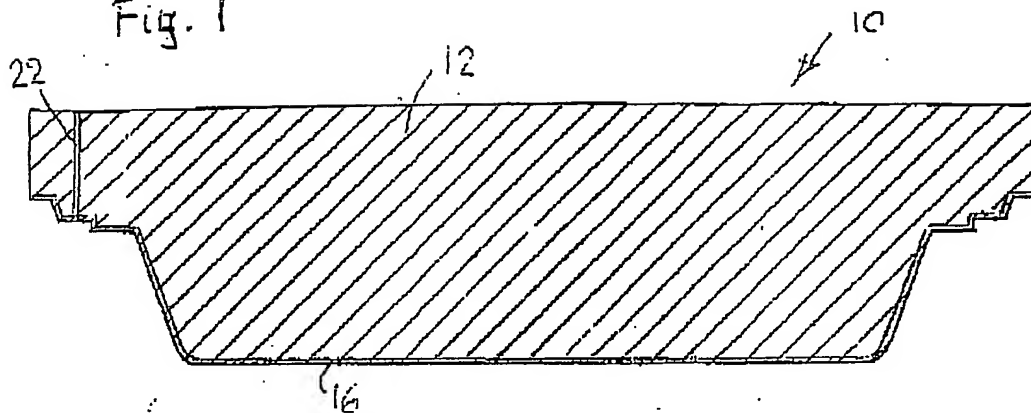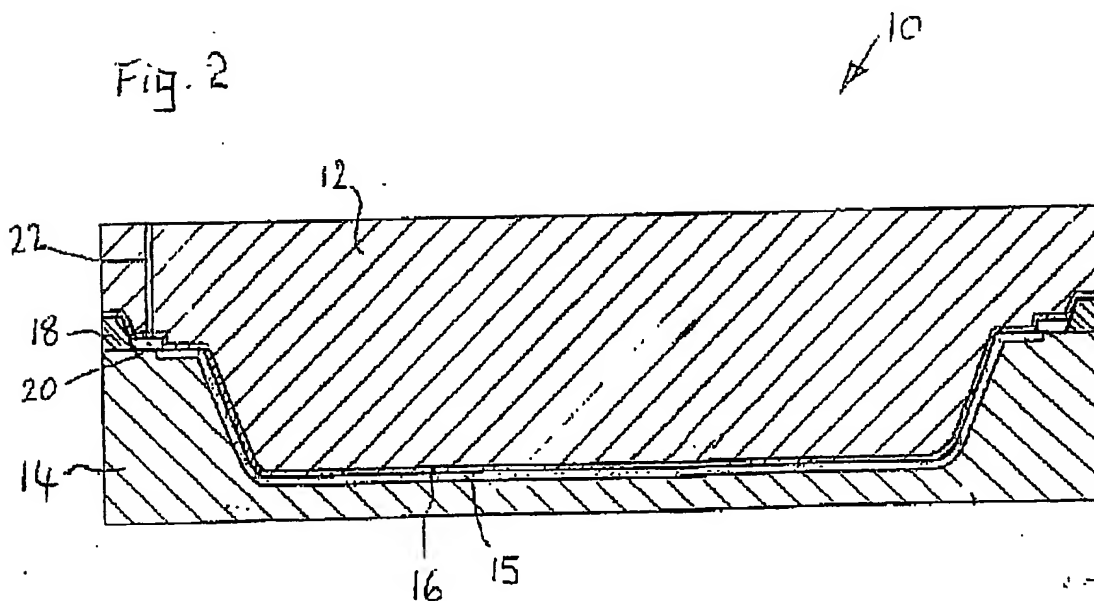


15783 MdX

P.T. Mansfield
Chartered Patent Agent
Agent for the Applicant

Accentus plc

Sheet 2 of 2

Fig. 3

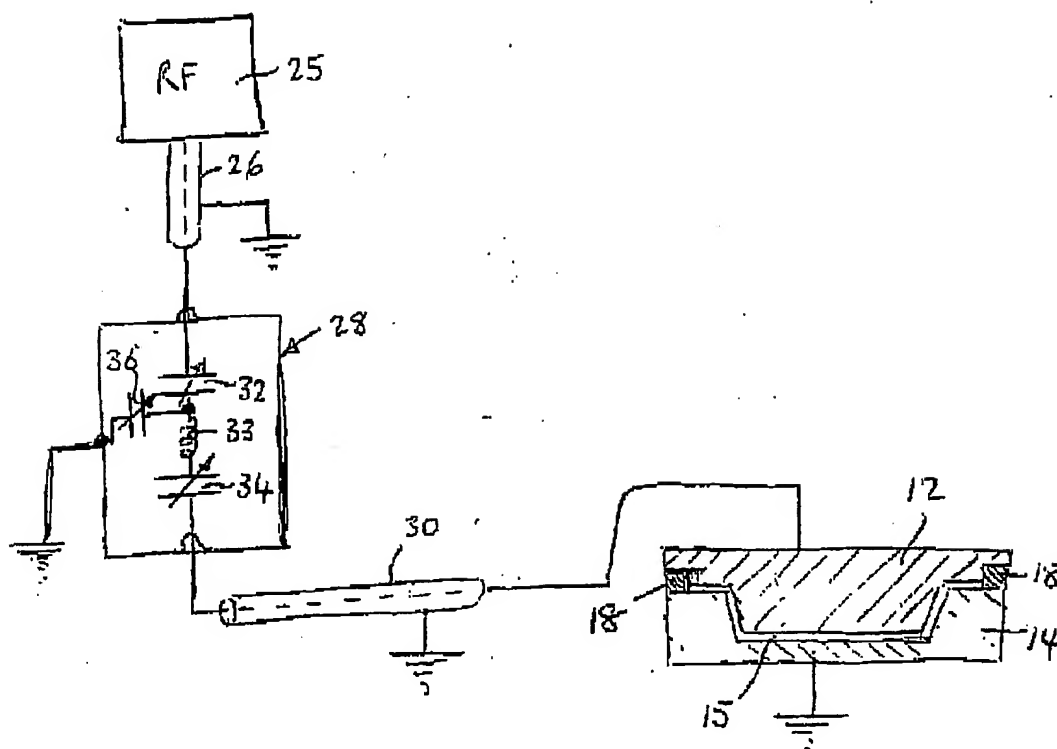

15783 MdX

P.T. Mansfield
Chartered Patent Agent
Agent for the Applicant

0069350 20-May-03 10:01

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.